

42MW Series

Accessories

D42MW1909X012

Specifications

For other materials or modifications, please consult TESCO.

OPERATING PARAMETERS

Pressure rating per criteria of ANSI/ASME B31.3

Maximum Rated Pressure

2500 psig / 172 bar

Operating Temperature

-40°F to 600°F / -40°C to 315°C

MEDIA CONTACT MATERIALS

Upper and Lower Housing

316 Stainless Steel

Diaphragm

Welded 316 Stainless Steel

Remaining Parts

316 Stainless Steel

PROCESS CONNECTIONS

1/4", 3/8", and 1/2" NPTF

Hastelloy® is a registered trademark of Haynes International, Inc.



**42MW ISOLATOR SHOWN
WITH SJS SERIES REGULATOR**

TESCOM 42MW Series instrument isolator is typically used with a TESCO SJS Series pressure tracking regulator - see SJS Series tracking regulator. This device isolates the regulator from corrosive and incompatible fluids.


Application

- Dual mechanical seal differential pressure control

Features and Benefits

- Designed to be used with TESCO's wide range of tracking regulators
- Assists in the control of pressure in fugitive emission and/or mechanical seals applications when combined with tracking regulators
- Complete 316 Stainless Steel construction is standard (Hastelloy® trim available)
- 5 feet / 1.5 meters Stainless Steel armored capillary line filled with Clearco HT-110 is included (additional lengths of capillary line are available)

42MW Series Drawing

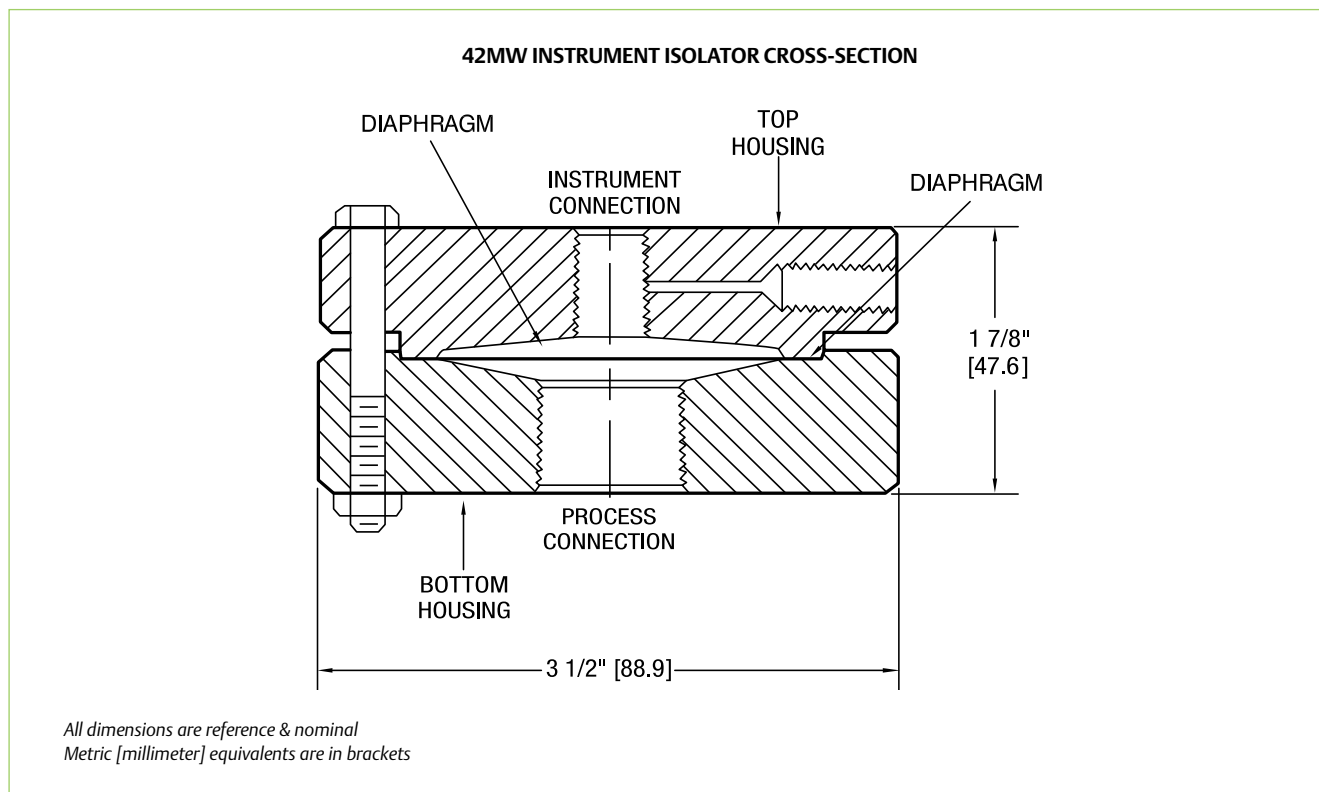

42MW Series Part Number Selector

Repair Kits, Accessories & Modifications may be available for this product. Please contact TESCOM for more information.

Example for selecting a part number:

42MW	6	2	08	00	S
BASIC SERIES	MATERIALS	CONNECTION PORT TYPE	PROCESS CONNECTION PORT SIZE	CAPILLARY TUBE LENGTH	FILL MATERIAL
42MW	5 – Hastelloy® 6 – 316 Stainless Steel	2 – NPTF	04 – 1/4" 06 – 3/8" 08 – 1/2"	00 – Direct Connect 05 – 5 feet / 1.5 meters 10 – 10 feet / 3.0 meters	S – Clearco HT-110



WARNING! Do not attempt to select, install, use or maintain this product until you have read and fully understood the *TESCOM Safety, Installation and Operation Precautions*.

D42MW1909X012 © 2012 Emerson Process Management Regulator Technologies, Inc. All rights reserved. 05/2012.
Tescom, Emerson Process Management, and the Emerson Process Management design are marks of one of the Emerson Process Management group of companies. All other marks are the property of their respective owners.